

# VISIONE

## Ultimate Soundbar

极 致 声 霸

## TABLE OF CONTENTS

<b>1. IMPORTANT SAFETY INFORMATION</b>	<b>2</b>
<b>2. QUICK S TART</b>	<b>3</b>
Unpacking and setting up	3
Top Button	4
Remote control	4
<b>3. PLACE YOUR VISIONE PRIMO</b>	<b>5</b>
Place the VISIONE Primo on the table	5
Wall mount the VISIONE Primo	5
<b>4. CONNECT YOUR VISIONE PRIMO</b>	<b>6</b>
Connect VISIONE Primo to your TV	6
Connect VISIONE Primo to other devices	7
Power On/Off your VISIONE Primo soundbar	7
<b>5. USE YOUR VISIONE PRIMO SYSTEM</b>	<b>8</b>
How to use a USB Storage device	8
How to use bluetooth with your VISIONE Primo	8
<b>6. SYSTEM</b>	<b>9</b>
Auto Standby	9
Auto Wake up	9
<b>7. TROUBLESHOOTING</b>	<b>9</b>
System	9
Sound	9
Bluetooth	9
Remote control	9
<b>8. PRODUCT SPECIFICATIONS</b>	<b>10</b>
Speaker architecture	10
Bluetooth section	10
USB section	10
Product dimension and weight	10

## 1. Important Safety Instructions

Read these operating instructions carefully before using the unit. Follow all the safety instructions listed below. Keep these operating instructions handy for future reference.

1. Read these instructions.
2. Keep these Instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth and make sure it is not connected to the power.
7. Do not block any ventilation openings. Install in accordance with the manufacturer' s instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use with the shelves, racks, stand ,or tables that can support the product safely (see instruction manual).
12. Unplug this apparatus during lightning storms or when unused for long periods of time.
13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
14. Protect the product from moisture (i.e. vases), and excess heat (e.g. a fireplace) or equipment creating strong magnetic or electric fields. Unplug the power cable from the AC wall socket if the unit malfunctions.

## Safety instructions for Alkaline batteries(remote control)

	If abused or misused, the batteries may leak.In extreme cases, they may even present a risk of <ul style="list-style-type: none"> <li>• explosion</li> <li>• fire development</li> <li>• smoke or gas developme</li> <li>• heat generation</li> </ul>				Dispose of batteries at special collection points or return them to your specialist dealer.		Store the products in a cool and dry place at room temperature (approx.20°C).
	Keep away from children.		Remove the batteries if the product will not be used for extended periods of time.		Do not mutilate or dismantle.		Do not continue to use defective batteries.
	Observe correct polarity. Immediately remove the batteries from an obviously defective product.		Pack/store charged batteries so that the terminals cannot contact each other danger of shorting out/fire hazard.		Do not expose to moisture.		Do not heat above 70°C, e.g.do not expose to sunlight or throw into a fire.

## Preventing damage to health and accidents

- ▷ Protect your hearing from high volume levels. Do not listen at high volume levels for long periods of time to prevent hearing damage.



- ▷ The product generates stronger permanent magnetic fields that could cause interference to cardiac pacemakers,implanted defibrillators (ICDs) and other implants.Always maintain a distance of at least 10cm between the product component containing the magnet and the cardiac pacemaker, implanted defibrillator or other implant.


## 2. Quick Start

### Unpacking and setting up

Thank you for purchasing the VISIONE Primo ultimate soundbar. The Primo is designed to bring an extraordinary sound experience to your home entertainment system. We urge you to take a few minutes to read through this manual, which describes the product and includes step-by-step instructions to help you set up and get started.

**CONTACT US:** If you have any questions about VISIONE Primo ultimate soundbar, its installation or its operation, please contact your retailer or custom installer.


**Step 1:** Unpack all components from the shipping box.

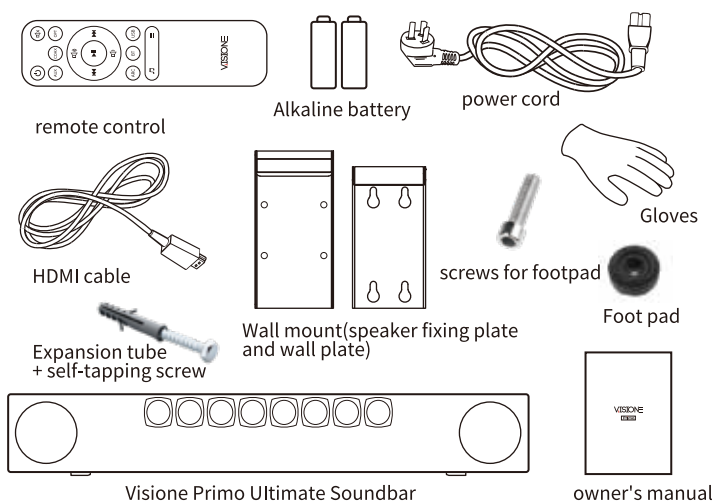


\* Template for wall mounted installation.

**Step 2:** Insert the batteries into the remote control.

**Step 3:** Place the Primo on a soft material (carpet or textile) that will not scratch the surface. Plug the power cord into the AC connector on the bottom panel (see the figure below), and then connect it to an AC power outlet.

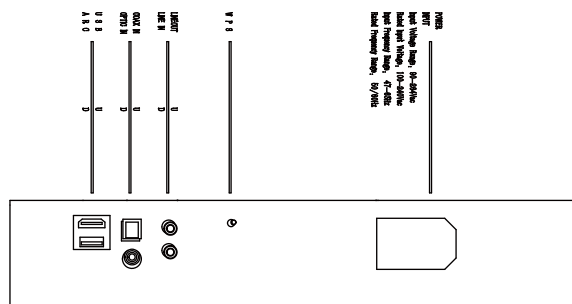


Step 4: Install the four footpads on the bottom of the Primo.

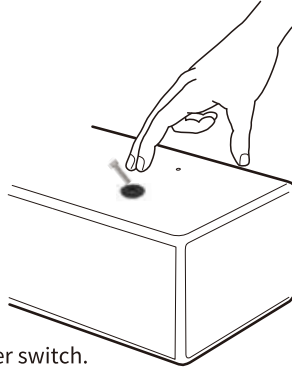

Step 5: Turn on the main power switch.

Step 6: If you plan to use the Primo with a TV, please refer to page 7-9.

## Top Button

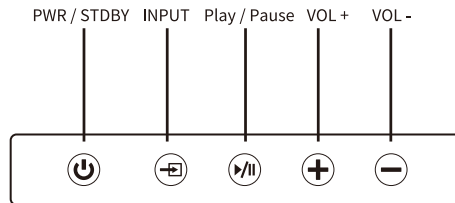


function definition: PWR / STDBY: On/Off button, long press until the display on to get into the standby mode.

INPUT: input source selection. Play / Pause: Play or pause the music during "BT" or "USB" input


VOL +: Volume up. VOL -: Volume down.

## Remote control

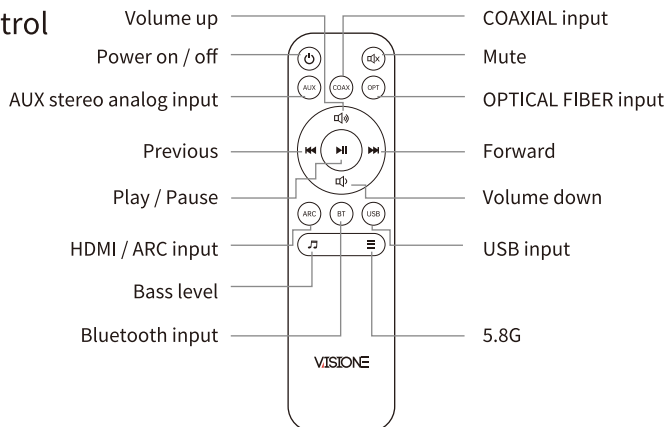


## 3. Place your VISIONE Primo

① Place the VISIONE Primo on the table

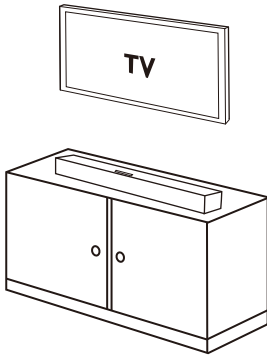


② Wall mount the VISIONE Primo

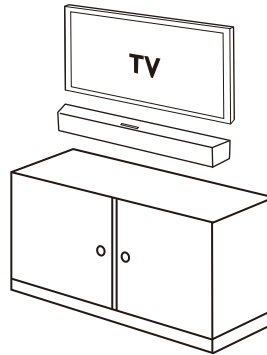


### \*Steps to install the Primo on the wall:

1. Fix one side of the pendant to the Soundbar.

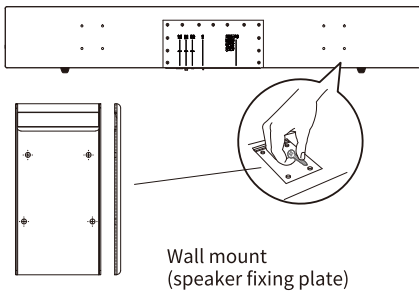

2. Use tape to fix the wall-mounted installation template on the wall, use a pen tip at the center of each mounting hole, mark the position of the wall mount bracket and remove the template.

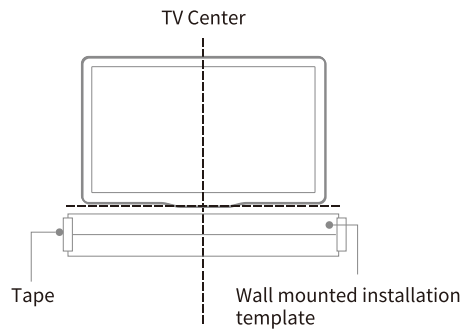

3. For installing the pendant on the wall, it must make 2cm downward for operating the buckles. It would be suggested to install the Primo first and hang on TV if you would prefer no gap in between.


4. The user can buy the suitable screws or mounts for different installation idea but the vertical hanging force for the screw must be greater than 30kg to make sure it is safe.

## 4. Connect your VISIONE Primo

### Connect VISIONE Primo to your TV

#### Connect to TV through HDMI input (ARC)


HDMI connection supports digital audio return. If your TV supports ARC, you can use an HDMI cable to connect the TV with the HDMI port which marked "ARC" to achieve sound return.

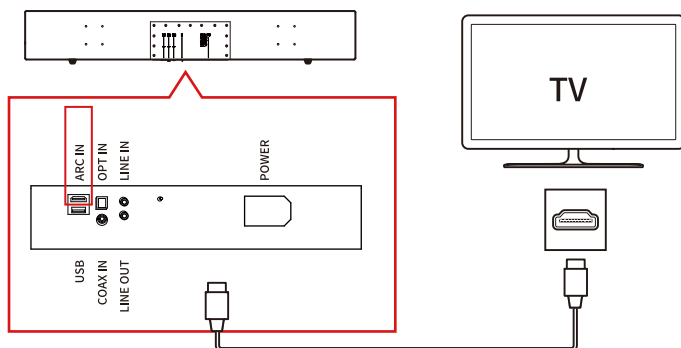

**Note:** Make sure your TV turned on the ARC function.

#### Connect to TV through Optical input


Optical connection supports digital audio which can replace the HDMI for the audio connection. If your TV does not support HDMI ARC, you can connect the TV with the corresponding port through the optical fiber (OPT IN) or COAX IN or LINE IN.

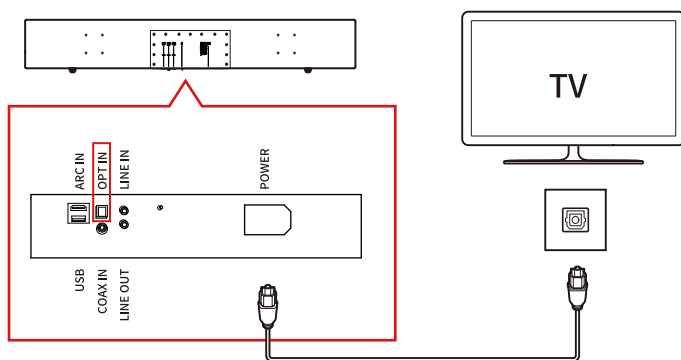

## Connect VISIONE Primo to other devices


Connect to other devices by using analog cable

- ① Connect the "AUX-OUT" on your portable devices to the Primo through "LINE IN" port by using an analog cable.
- ② Connect the audio source to the Primo through "LINE IN" port if that machine do not have any HDMI or Optical or digital output jacks.
- ③ Connect the subwoofer to the Primo through "LINE OUT" port.

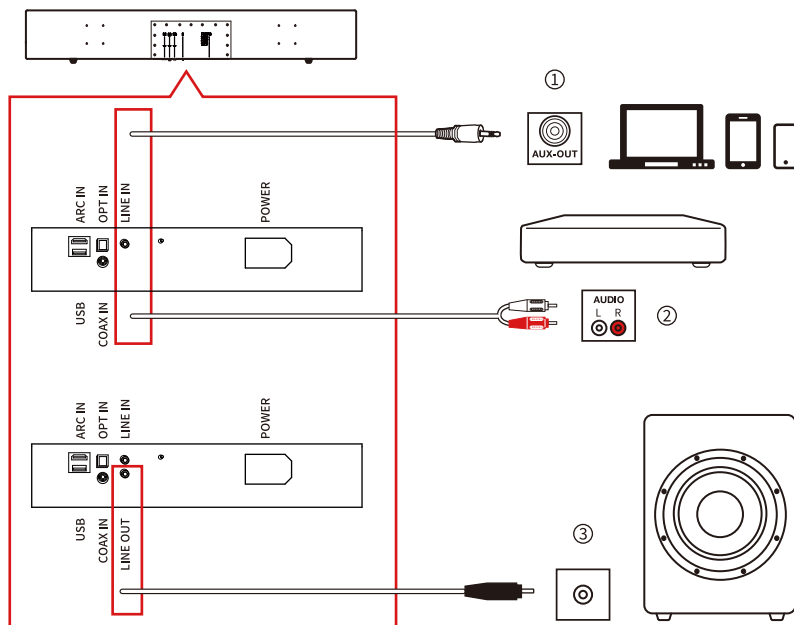

## Power On/Off your VISIONE Primo soundbar

To turn on the Primo, long press the power button until the display shows "Primo" and long press the power button to shut it down until the display goes off.

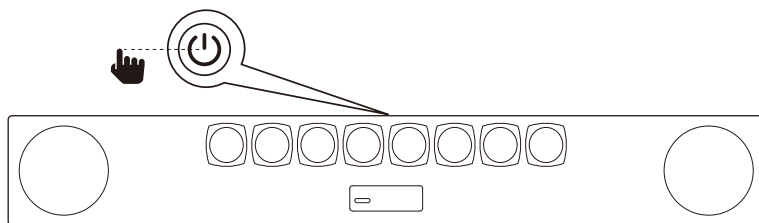




## 5. Use your VISIONE Primo system

### How to use a USB Storage device

You can play music files located on USB storage device through the Primo.



1. Connect USB driver on the USB Port which locates on the back of Primo.
2. Press the "USB" button on the remote control and the music will be played automatically if USB device is detected.

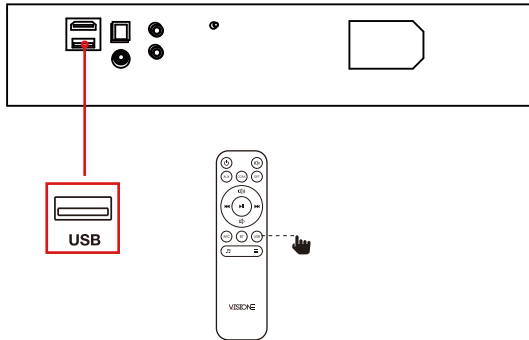

**Note:** USB interface: Supports USB1.1(FS). Support disk format: FAT32. Capacity:  $\leq 64G$  (larger storage will affect loading time). In the future, upgrades can be made through the USB port.

### How to use bluetooth with your VISIONE Primo

1. Press the Bluetooth button on the remote control to enter the Bluetooth pairing mode.
2. Find Primo through the Bluetooth pairing list of the mobile device for pairing.

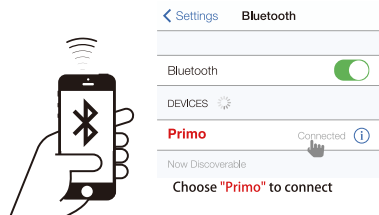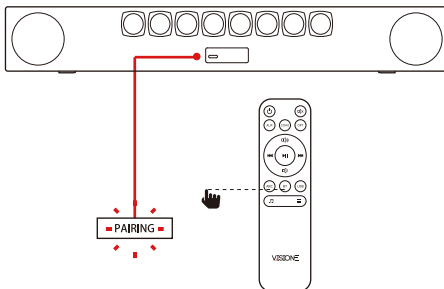

## 6. System

### Auto Standby

- When there is no Bluetooth signal, the Primo would enter the standby mode automatically.

### Auto Wake up

- If the Primo is connected to TV via HDMI ARC, it can turn on/off by controlling the TV on/off.

## 7. Troubleshooting

Refer to the list below if this product does not function properly. If the problem you are experiencing is not listed below or if the instructions below do not help, turn off the product, disconnect the power cord, and contact your retailer or custom installer.

### System

- The unit will not turn on. Check if power cord is plugged into the outlet and the Primo.

### Sound

- No sound from Primo:
  - 1) Make sure that the Primo is not muted.
  - 2) On the remote control, select the correct audio input source.
  - 3) Connect the audio cable from your Primo to your TV or other devices.

### Bluetooth

- A source device cannot connect with the Primo :
  - 1) You have not enabled the Bluetooth function of the source device. See the user manual of the source device on how to enable the function.
  - 2) The Primo is already connected with another Bluetooth device. Press and hold Bluetooth button on your remote control to disconnect the connected source device, then try again.
  - 3) Reboot your Bluetooth device and try to pair again with the Primo.
- Quality of audio play from a connected Bluetooth device is poor :  
The Bluetooth reception is poor. Move the source device closer to the Primo.

### Remote Control

- The remote control does not work :
  - 1) Check if the batteries are drained and replace with new batteries.
  - 2) If the distance between the remote control and the main unit is too far, move it closer to the unit.

## 8. Product specifications

### Speaker architecture

- 2.2 crossover full-range speaker
- 6-channel independent DSP power amplifier system
- 8x3 inch full frequency wide range unit
- 2x6.5 inch dual voice coil woofer
- Signal-to-noise ratio 90dB
- Speaker power 480W(Max continuous)
- Frequency response 40Hz-20kHz
- Standby power consumption <0.5W
- Distortion  $\leq 0.5\%$  @1kHz
- Operating temperature range 0~40°C
- Rated Input Voltage 100~240Vac
- Rated Input Frequency 50/60Hz

### Bluetooth section

- Version V5.0
- Effective distance  $\leq 10\text{M}$

### USB section

- USB Support FAT32 format
- capacity  $\leq 64\text{G}$

### Product dimension and weight

- Soundbar Dimensions (WxDxH) 1434x241x210mm
- Net Weight 23kg
- Packaging Dimensions (WxDxH) 1510x325x280mm
- Gross Weight 29kg
- color Dark night/white fog

# 目录












1. 重要安全提示	12
2. 快速入门	13
开箱和设置	13
顶部按键	14
遥控器	14
3. 摆放您的VISIONE Primo	15
将VISIONE Primo摆放在桌面	15
将VISIONE Primo安装至墙壁	15
4. 连接您的VISIONE Primo	16
将VISIONE Primo连接至电视机	16
将VISIONE Primo连接至其他设备	17
启动/关闭您的VISIONE Primo声霸	17
5. 使用您的VISIONE Primo	18
如何使用USB功能	18
如何使用蓝牙设备	18
6. 系统	19
自动待机	19
自动唤醒	19
7. 故障排除	19
系统	19
声音	19
蓝牙	19
遥控器	19
8. 产品规格	20
音箱架构	20
蓝牙部分	20
USB部分	20
产品尺寸和重量	20

## 1. 重要安全提示

使用本设备前请仔细阅读这些操作说明。请遵循下面列出的所有安全说明。将这些操作说明放在手边以备将来参考。

1. 请阅读本安全提示。
2. 请妥善保管本安全提示。
3. 请注意所有警告提示。
4. 请遵守所有指令。
5. 不要在靠近水的地方使用本产品。
6. 只有在断开电源后方可对产品进行清洁。
7. 不要堵塞任何通风口。按照制造商的说明进行安装。
8. 不要安装在任何热源附近，例如散热器、热调节器、火炉或其他产生热量的设备（含放大器）。
9. 本产品的电源必须符合使用说明书中的要求以及产品背面的要求。请一直保持将产品与接地插座连接。
10. 请确保电源线不会被踩到或受到挤压，特别是不要从插头、插座和产品的重要部位踏过。
11. 本产品只能与可以稳妥承载产品重量的支架、台架或底座一起使用(参见使用说明书)。
12. 在风暴雷雨时或长期未使用时断开产品的电源。
13. 所有维修工作必须交由具有专门资质的服务人员进行。当本产品受到任何形式的损害，当电源线受损，当液体或者异物渗入到产品内或产品受到雨淋或湿气侵入，当产品不能正常工作或者关闭时，必须执行保养工作。
14. 防止产品受潮（例如花瓶）、过热（例如壁炉）或产生强磁场或电场的设备。如果本机发生故障，请从 AC 壁式插座中拔下电源线。

### 碱性电池的安全提示(遥控器)

	如果滥用或不按规定使用，电池可能漏液。在极端情况下，还可能导致以下危险： • 爆炸 • 着火 • 过热 • 产生烟雾或有害气体			旧电池只可交给专业回收点或专业经销商处理。		将设备存放在阴凉干燥的地方(约20°C)。	
	将电池存放在儿童不能触及的地方。		如果产品长时间不用，应将电池取出。		不得拆解电池或使电池变形。		切勿继续使用损坏的电池。
	放入电池时注意正确极性。 产品明显损坏时，请取出电池。		存放时电池的两极不得发生接触，以免造成短路。		防止电池受潮。		不得将电池加热超过70°C，避免阳光照射，不得将电池扔进火里。

### 避免健康受损及事故发生

▷ 注意保护听力，免受高音量伤害。为了避免您的听受损，请不要长时间使用高音量收听音乐。



▷ 本产品会产生较强的持久磁场，可能会对心脏起搏和植入式除颤器(ICD)和其它植入物造成干扰。含有磁铁的产品元件与心脏起搏器、植入式除颤器或其它植入物之间必须至少保持10厘米的距离。


## 2.快速入门

### 开箱和设置

感谢您购买 VISIONE Primo, Primo会为您的家庭娱乐系统带来非凡的音效体验。我们强烈建议您花几分钟时间阅读本手册，其中介绍了产品并包含逐步说明以帮助您进行设置。

联系我们：如果您对 VISIONE 极致声霸、如对其安装或操作有任何疑问，请联系您的零售商或定制安装人员。


步骤 1：开箱从产品包装箱中取出所有组件。

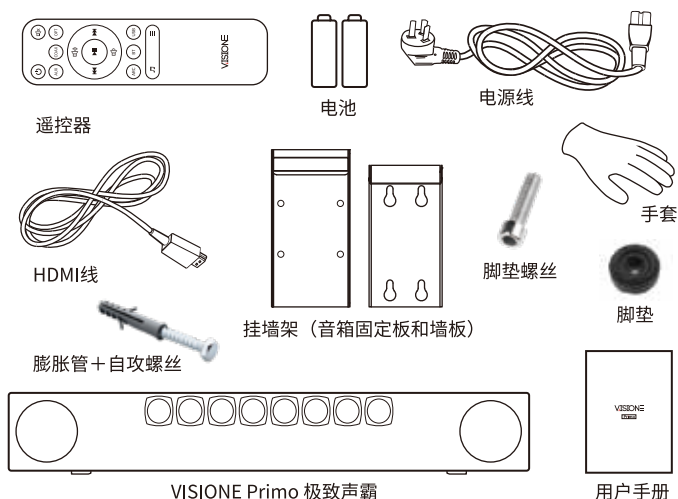


\* 加挂墙安装示意图。

步骤 2：将电池插入遥控器。

步骤 3：将 Primo放在不会划伤表面的柔软材料（地毯或纺织品）上。将电源线插入底部面板上的交流连接器（见下图），然后将其连接到交流电源插座。

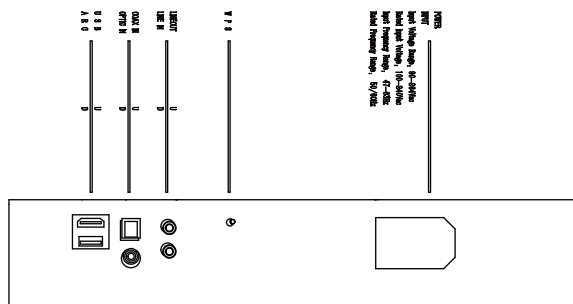


步骤 4：将四个减震脚垫安装于 Primo 底部。

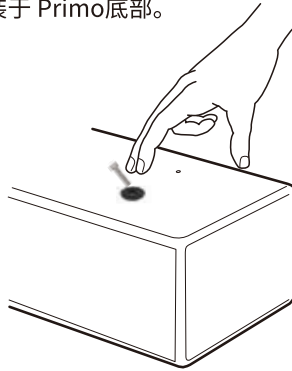

步骤 5：打开主电源开关。

步骤 6：如果您打算将声霸与电视机一起使用，请参阅第 17-19 页。


## 顶部按键

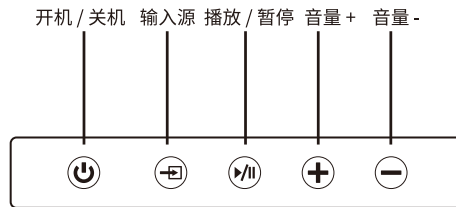

按键功能：PWR/STDBY：开/关机系统进入待机模式，长按直到声霸前显示屏亮起。


INPUT：输入源选择，Play / Pause：播放/暂停：此功能在“BT”和“USB”输入切换“播放”和“暂停”音乐播放时有效。VOL +：音量增大，VOL -：降低音量。

## 遥控器

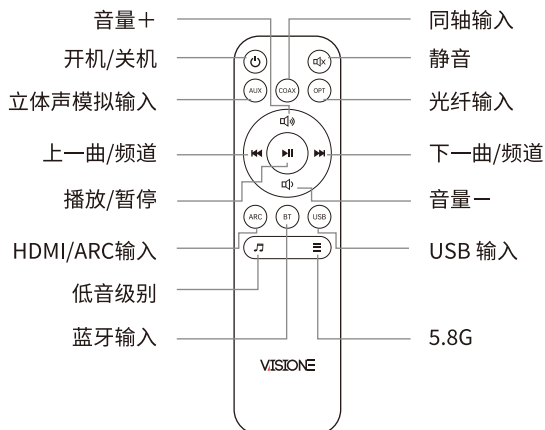


### 3. 摆放您的VISIONE Primo

① 将VISIONE Primo摆放在桌面

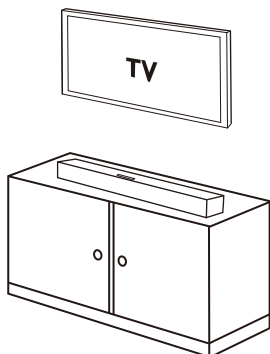



② 将VISIONE Primo安装至墙壁

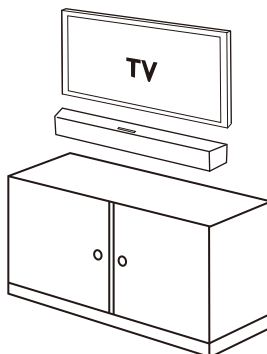

\*Primo安装至墙壁的步骤：

1. 将挂件的一边固定在声霸上。

2. 使用胶带将挂墙安装示意图固定在墙壁上，用笔尖在每个安装孔的中心，标记挂墙架位置并取下纸张。

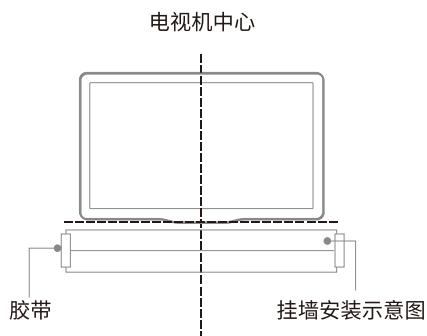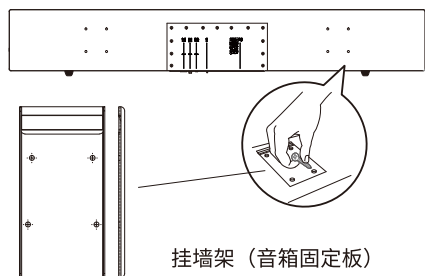

3. 挂件属于上下扣，在安装时必须留有2cm的挂扣操作空间，如果声霸与电视机不留空档，用户可以选择先安装声霸，再挂电视机。

4. 用户使用安装环境不同，可根据自己的安装固定处自行购买固定螺丝安装，垂直挂力应大于30kg。




## 4. 连接您的VISIONE Primo

### 将声霸连接至电视

#### 通过HDMI输入(ARC)连接至电视


HDMI连接支持数字音频回传。如果您的电视支持HDMI ARC，您可以使用一根HDMI电缆连接到具有"ARC" 标识的HDMI插口的电视上，来实现声音的回传。

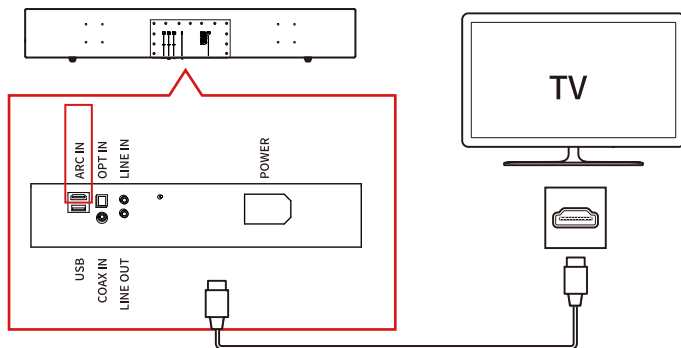

注意: 请确保您的电视上的 **HDMI ARC** 功能已开启。

#### 通过光纤连接至电视


光纤连接支持数字音频，可以替代HDMI进行音频连接。如果您的电视没有支持HDMI ARC，您可以通过声霸的光纤 (OPT IN)或COAX IN、LINE IN 来连接对应插口的电视机。

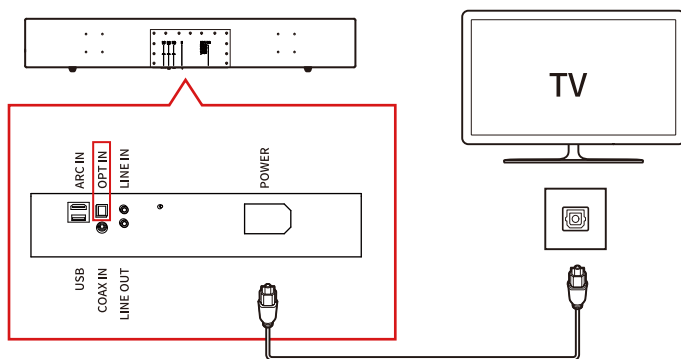

## 将声霸连接至其他设备


### 通过模拟音频电缆连接设备

- ① 使用模拟电缆连接Primo上的AUX-IN与便携设备上的AUX-OUT接口。
- ② 连接到一个没有HDMI插口并且没有光纤、数字输出插口的音频源上，请通过“LINE IN”端口将音频源连接到 Primo。
- ③ 将Primo与超低音炮连接。

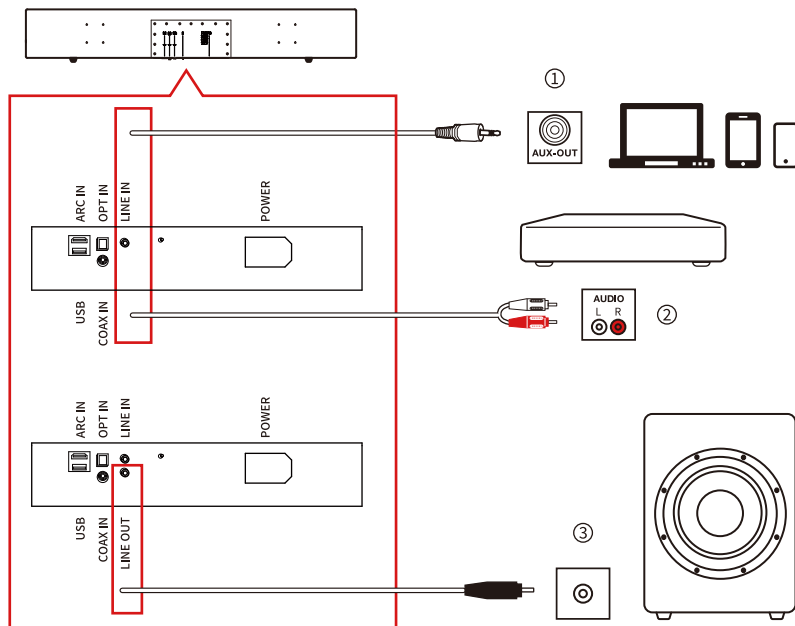

## 启动/关闭您的VISIONE Primo极致声霸

开机长按电源键，显示屏显示“Primo”开机成功；关机长按电源键，显示屏熄灭，关机成功。

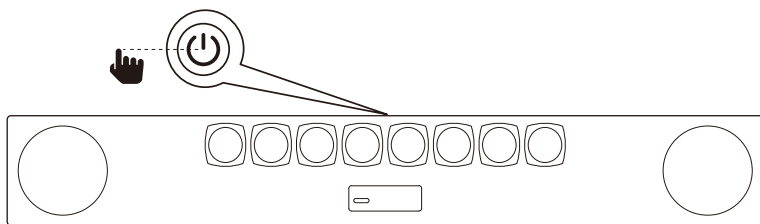


## 5. 使用您的VISIONE Primo

### 如何使用USB设备

通过Primo播放位于 USB 存储设备上的音乐文件。



1. 在设备背部将 USB 驱动器连接至您的Primo。
2. 按下遥控器上的 "USB" 按钮。如果检测到 USB，音乐将开始自动循环播放。

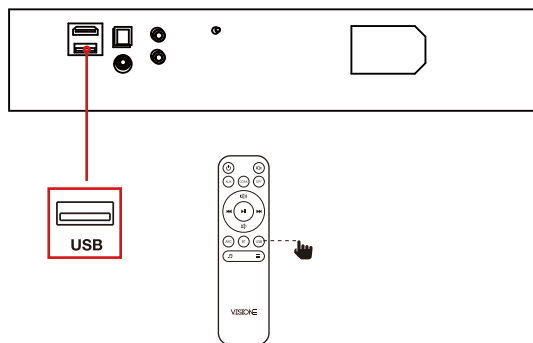

请注意：USB接口：支持USB1.1(FS)、支持磁盘格式：FAT32、容量：≤ 64G（更大的存储空间会影响加载时间）、未来可以通过USB端口进行固体升级。

### 如何使用声霸的蓝牙功能

1. 按遥控器上的蓝牙按钮进入蓝牙配对模式
2. 通过移动设备的蓝牙配对清单找到Primo来进行配对。

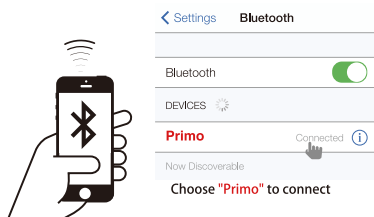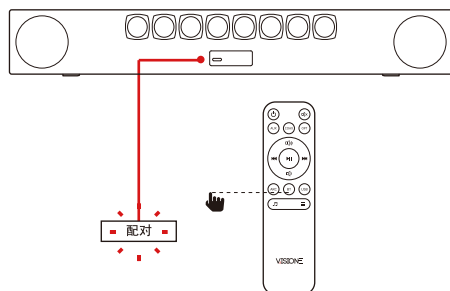

## 6. 系统

### 自动待机

- 待机，蓝牙没有信号时，Primo会自动进入待机。

### 自动唤醒

- ARC连接电视机后，当电视机开启会自动把Primo打开，电视机关闭时也会把Primo同步关掉。

## 7. 故障排除

如果本产品无法正常工作，请参阅下表。如果您遇到的问题未在下面列出，或者如果下面的说明不起作用，请关闭产品，断开电源线，并联系您的零售商或定制安装人员。

### 系统

- 设备无法启动：检查电源线是否插入插座和Primo。

### 声音

- Primo没有声音：

- 1) 确认Primo未设置静音。
- 2) 使用遥控器选择正确的音频输入源。
- 3) 通过音频电缆将您的Primo连接至电视或其他设备。

### 蓝牙

- 源设备无法连接至Primo：

- 1) 您尚未启用源设备的蓝牙功能。请参阅源设备的用户手册以启用该功能。
- 2) Primo已与另一台蓝牙设备连接。长按遥控器上的“蓝牙”按钮以断开连接的设备，然后重试。
- 3) 重启蓝牙设备，然后尝试重新与Primo配对。

- 已连接蓝牙设备的音频播放质量较差：蓝牙接收信号不好。将源设备置于靠近Primo的地方。

### 遥控器

- 遥控器无法正常运行：

- 1) 检查电池是否已耗尽并更换新电池。
- 2) 如果遥控器和主设备之间的距离太远，请将其移近主设备。

## 8. 产品规格

### 音箱架构

- 2.2分频全频音箱
- 6通道独立DSP功放系统
- 8x3寸全频广音域单元
- 2x6.5寸双音圈低音单元
- 信噪比 90dB
- 音箱承受功率 480W(最大连续)
- 频率响应 40Hz-20kHz
- 待机功耗 <0.5W
- 失真度  $\leq 0.5\%$  @1kHz
- 工作温度 0~40°C
- 额定输入电压 100~240Vac
- 额定输入频率 50/60Hz

### 蓝牙部分

- 版本 V5.0
- 有效距离  $\leq 10\text{M}$

### USB部分

- USB 支持FAT32格式
- 容量  $\leq 64\text{G}$

### 产品尺寸和重量

- 声霸尺寸 (长 x 宽 x 高) 1434x241x210mm
- 净重 23kg
- 包装尺寸 (长 x 宽 x 高) 1510x325x280mm
- 毛重 29kg
- 颜色 暗夜黑/雾光白

# VISIONE

Primo